




PCBVEDO200EN

VEDO 200 CONTROL PANEL ENGLISH

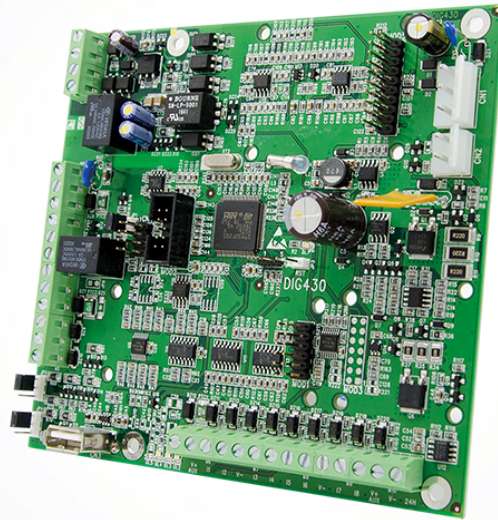

Vedo series alarm control panel. Equipped with 8 on-board zones, expandable to 200 mixed wire/radio zones, 1 24-hour zone, double function for a maximum of 400 zones, integrated PSTN telephone dialler, RS 485 serial bus for the connection of additional modules, 1 relay output and 2 open collector outputs. Manages up to 16 areas with 32 different activation programmes (scenarios) and daily timers, 50 IN /OUT expansions, 16 proximity readers, 16 Safe Key keypads, 4 Safe Touch, 4 Planux/Mini Touch Manager and 8 radio receivers. Self-resettable fuse for the siren power supply output, RS 485 serial bus and sensor power supplies. Equipped with USB port for connection to a PC with Safe Manager configuration software. All zones are configurable as NC, NO, single, double and triple balance as a double zones.



PCBVED0200EN

VEDO 200 CONTROL PANEL ENGLISH

MAIN FEATURES

Number total inputs:	
Number of inputs on board:	8
Number of zone max (Double function):	400
Balance type:	NA, NC, Single, double, triple
Number of outputs:	100
Number of relay outputs on central board:	1 (3A@24VDC)
Number TC outputs on central board:	2
Areas number:	16
Number of user codes:	200
Partial controls managed:	2
Number of insertion programs (scenarios):	32
Central programming:	

COMMUNICATION

Built-in digital communicator:	Yes
Management interface of the vocal guide:	Yes
Maximum number of audio messages Text to Speech:	48

MODULE EXPANSION ON BUS

Number expansions IN / OUT:	50
Number proximity reader:	16
Number Safekey keyboards:	16
Number Safetouch keyboards:	4
Number of supervisor manager:	4
Number radio receivers:	8
Number modules image conversion PAL / IP:	4
Number cameras managed:	32

MODULE EXPANSION PLUG

Audio module:	Yes
GSM module:	Yes
IP Module:	Yes