



ELECTRONIC KEY CODE
ACCESS CONTROL

 **Comelit**[®]
Passion. Technology. Design.

Electronic key types

Comelit offers 2 anti-vandal electronic key types which use a code: with or without a proximity reader.



SKB - ELECTRONIC KEY CODE, 100 CODES

- ZAMAK BODY
- CHROME-PLATED BUTTONS WITH BACKLIGHTING
- PROTECTION INDEX IP54 "WATERPROOF"
- ANTI-VANDAL KEYPAD
- UP TO 100 USER CODES AND 1 SYSTEM MANAGER CODE
- 2 RELAYS (MONOSTABLE OR BISTABLE MODE)
- RELAY ADJUSTMENT FROM 1 TO 99 SECONDS (0 = BISTABLE)
- MANAGEMENT OF ONE "CLOCK" INPUT - SIMPLE OPENING BASED ON TIME BANDS
- WIEGAND OUTPUT MANAGEMENT
- ALARM CODE
- MANAGEMENT OF ONE EXIT BUTTON



SKR - ELECTRONIC KEY CODE, 100 CODES, INTEGRATED READER, 500 BADGES

- ZAMAK BODY
- CHROME-PLATED BUTTONS WITH BACKLIGHTING
- INTEGRATED RFID READER, MIFARE TECHNOLOGY
- 500 PROXIMITY KEYS CAN BE PROGRAMMED
- PROTECTION INDEX IP54 "WATERPROOF"
- ANTI-VANDAL KEYPAD
- UP TO 100 USER CODES AND 1 SYSTEM MANAGER CODE
- 2 RELAYS (MONOSTABLE OR BISTABLE MODE)
- RELAY ADJUSTMENT FROM 1 TO 99 SECONDS (0 = BISTABLE)
- MANAGEMENT OF ONE "CLOCK" INPUT - SIMPLE OPENING BASED ON TIME BANDS
- WIEGAND OUTPUT MANAGEMENT
- ALARM CODE
- MANAGEMENT OF ONE EXIT BUTTON

BADGES AND PROXIMITY CARDS

Art. SKR can be used with badges and proximity cards:





SK90500/A SK9050R/A SK9050Y/A SK9050G/A SK9050B/A



SK9050G0/A SK9050GR/A SK9050GY/A SK9050GG/A SK9050GB/A



SK9052

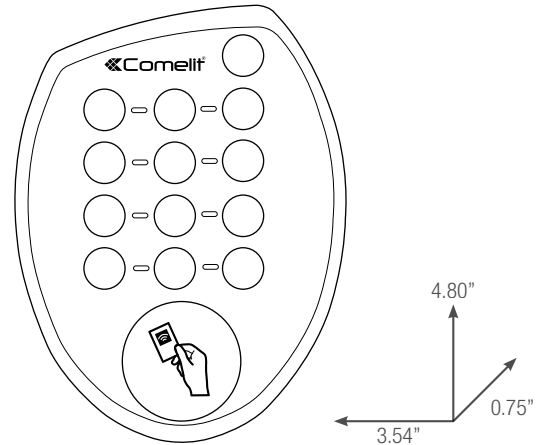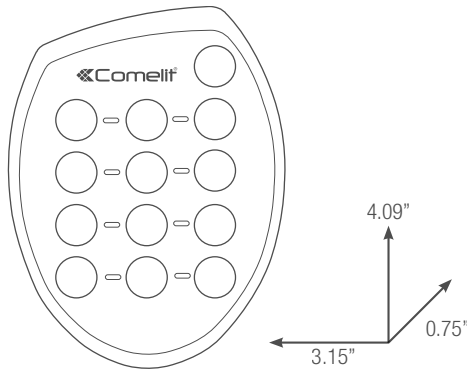

Codes:



SKB

ELECTRONIC KEY CODE, 100 CODES

Anti-vandal electronic key code in zamak, 100 codes of 3 to 6 characters, backlit buttons. Configurable relays in monostable mode from 1 to 99 seconds or in bistable mode. Exit button, clock and alarm management. Option of external relay connected to RS485 serial line. Operating Temperature from -25°C to +55°C, IP54. Dimensions 4.09" x 3.15" x 0.75".



SKR

ELECTRONIC KEY CODE, 100 CODES, INTEGRATED READER, 500 BADGES

Anti-vandal electronic key code in zamak, 100 codes of 3 to 6 characters, backlit buttons. With integrated RFID reader, Mifare technology. 500 proximity keys can be programmed and configured once learned. Configurable relays in monostable mode from 1 to 99 seconds or in bistable mode. Exit button, clock and alarm management. Opening with code, badge or code and badge. Option of external relay connected to RS485 serial line. Temperature from -25°C to +55°C, IP54. Dimensions 4.80" 3.54" x 0.75".



SKREL

EXTERNAL RELAY CARD FOR SKB/SKR

External relay for SKB/SKR electronic keys with connection to RS485 serial line.



4399

POWER SUPPLY 12 VDC 4A PRIMARY 240 VAC

Secondary power supply 12 Vdc 4A primary 240 Vac. The secondary output voltage can be adjusted between 12 Vdc and 13.8 Vac. 6-DIN module container Dimensions: 4.13" x 3.74" x 2.56".



ELECTRONIC PROXIMITY BADGE

Electronic proximity badge. Badge can be used with Comelit SimpleKey Basic, SimpleKey Advanced, SimpleSafe VEDO and SimpleHome systems. 10 colours available for a single apartment. Keyring format in ABS. Dimensions: 1.61 x 1.37 x 0.15".



SK9052

USER CARD - CREDIT CARD FORMAT

Electronic proximity badge fitted with an anti-forgery electronic chip. MIFARE technology, 13.56 MHz, ISO 14443A, ABS key fob format, credit card format: 3.34 x 2.12 x 0.03".

Cod. 263200494
8 023903 302868

www.comelitgroup.com

 **Comelit**[®]
Passion. Technology. Design.